



2		1		
REVISONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	2/25/15	BS
	B	MOVED SHAFT NUT TO VALVING ASSEMBLY	7/8/15	MD
	C	PACKAGING BOX CHANGED & ADDED STRAP BEFORE BOXING	5/10/17	CR
	D	CHANGED TO SEAL SCREW BODY MOVED SHAFT NUT TO SHOCK ASSEMBLY DRAWING REFORMATTED CHANGE IFP DEPTH & PRESSURE	11/11/20	JS / VT

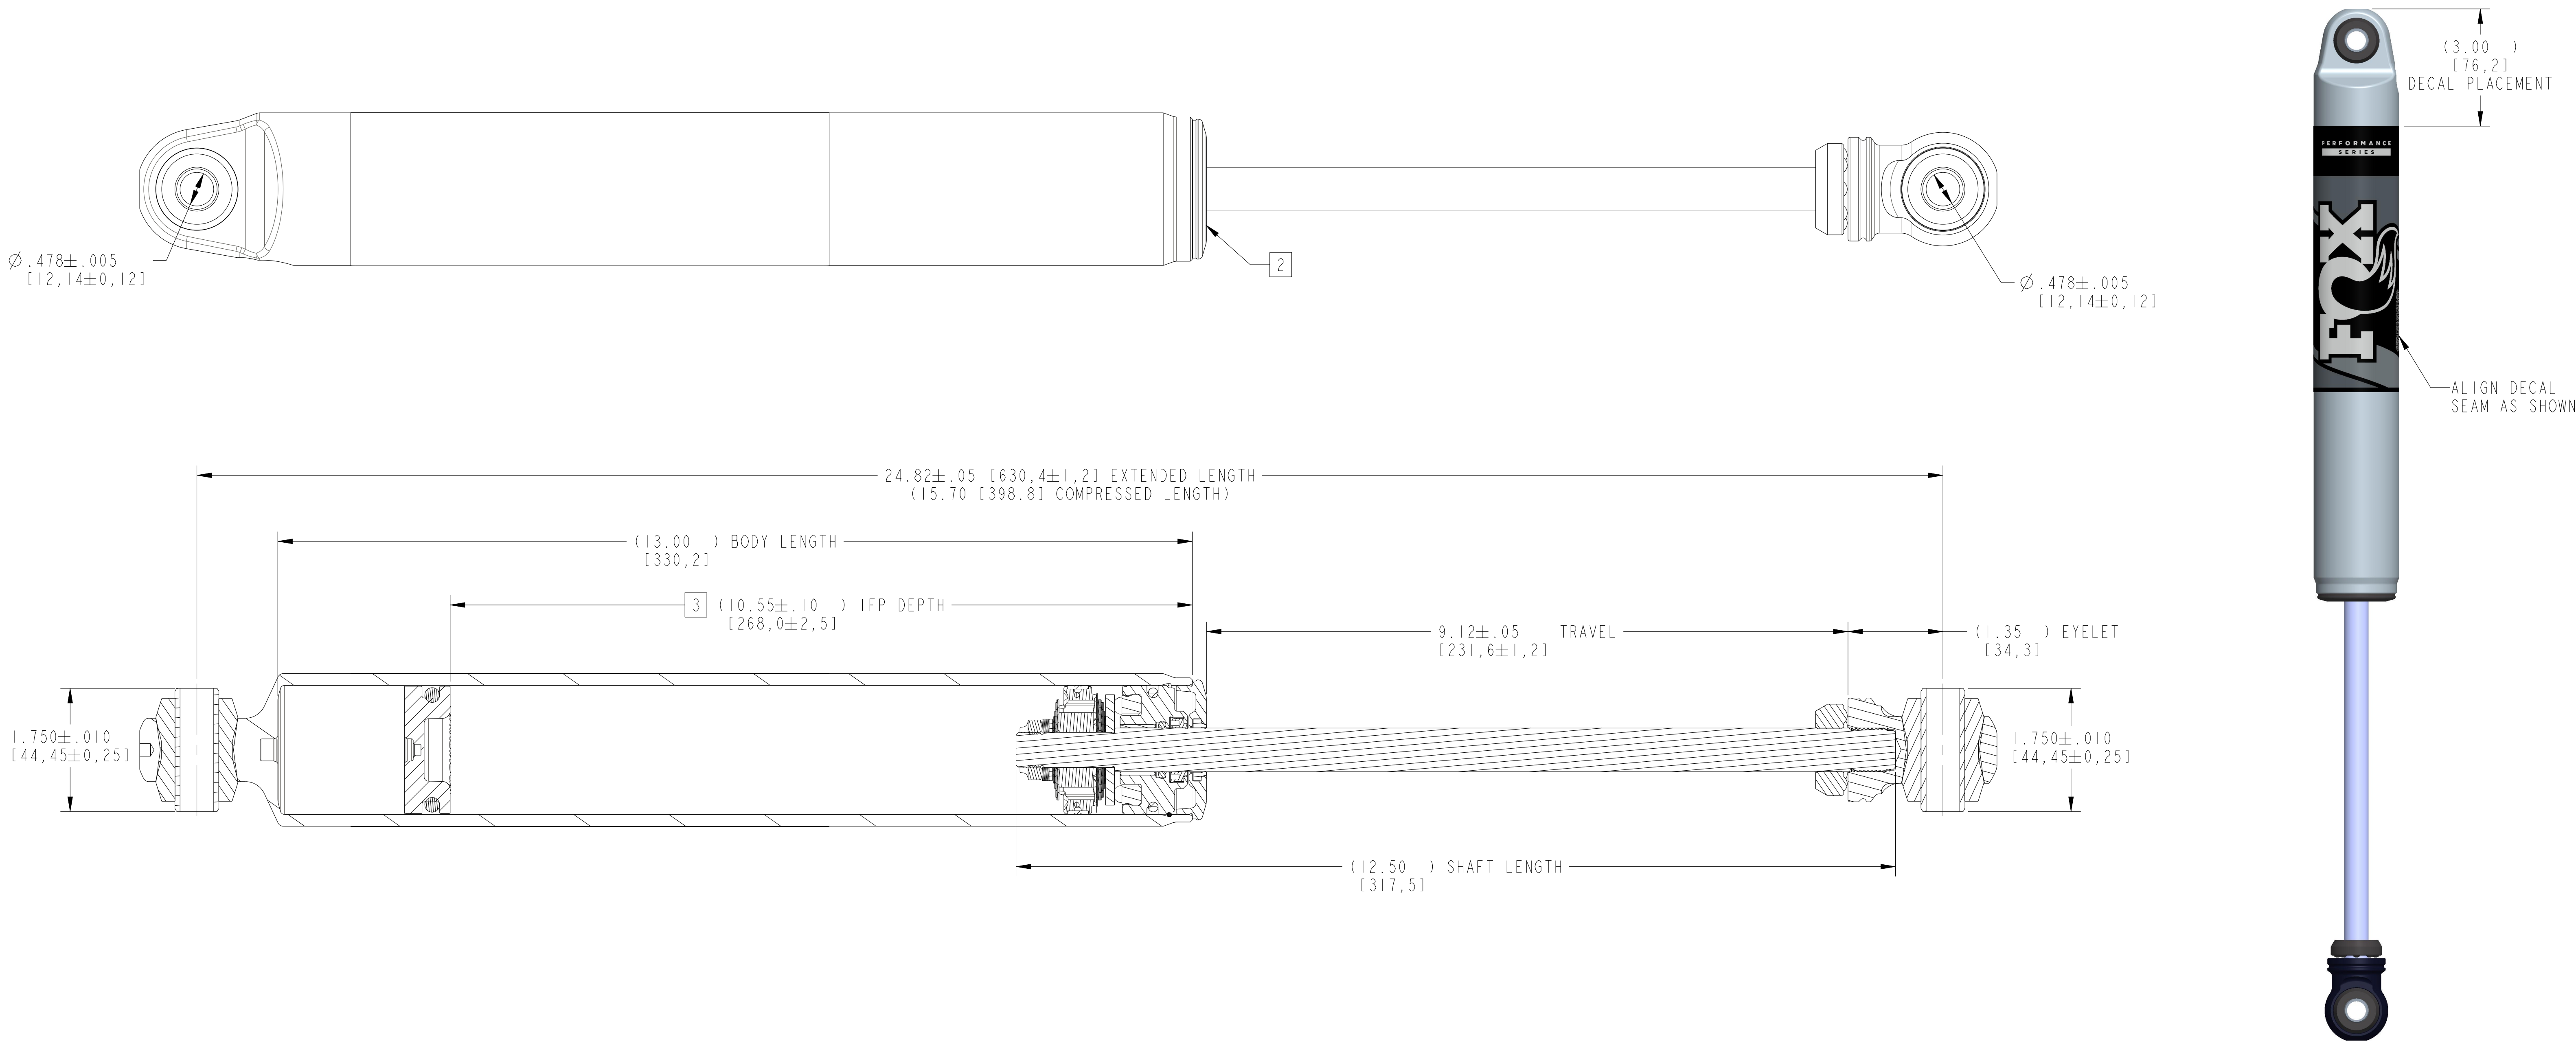

NOTES:

1. APPLICATION: LAND ROVER DISCOVERY 2 REAR (98-04) - 1.5-2.5" LIFT
2. BEARING CAP MARKED WITH DATE CODE, FOX PART NUMBER AND WORK ORDER NUMBER.
3. IFP DEPTH DIMENSION IS AFTER FINAL ASSEMBLY.
4. NITROGEN CHARGE PRESSURE 105-115 PSI.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES (MM)		PER ASME Y14.5-2018		 FOX FACTORY, INC.	
DEV PROJECT #:					
TOLERANCES ARE:		APPROVALS		TITLE	
DECIMALS .XX [.X] ±.01 [.0, .25] .XXX [.XX] ±.005 [.0, .13]	ANGLES ± 1°	DWN. BY B SMITH	DATE 09-Sep-14	98-04 Land Rover Discovery 2 Rear, PS, 2.0, 1FP, 9.1", 1.5-2.5" Lift	
THIRD ANGLE PROJECTION		CHK. BY			
		ENG. B SMITH	09-Sep-14	SIZE	DWG. NO.
		MFG.		D	985-24-128
		QC.		PLOT SCALE: 0.90	
				SHEET: 1 OF 4	

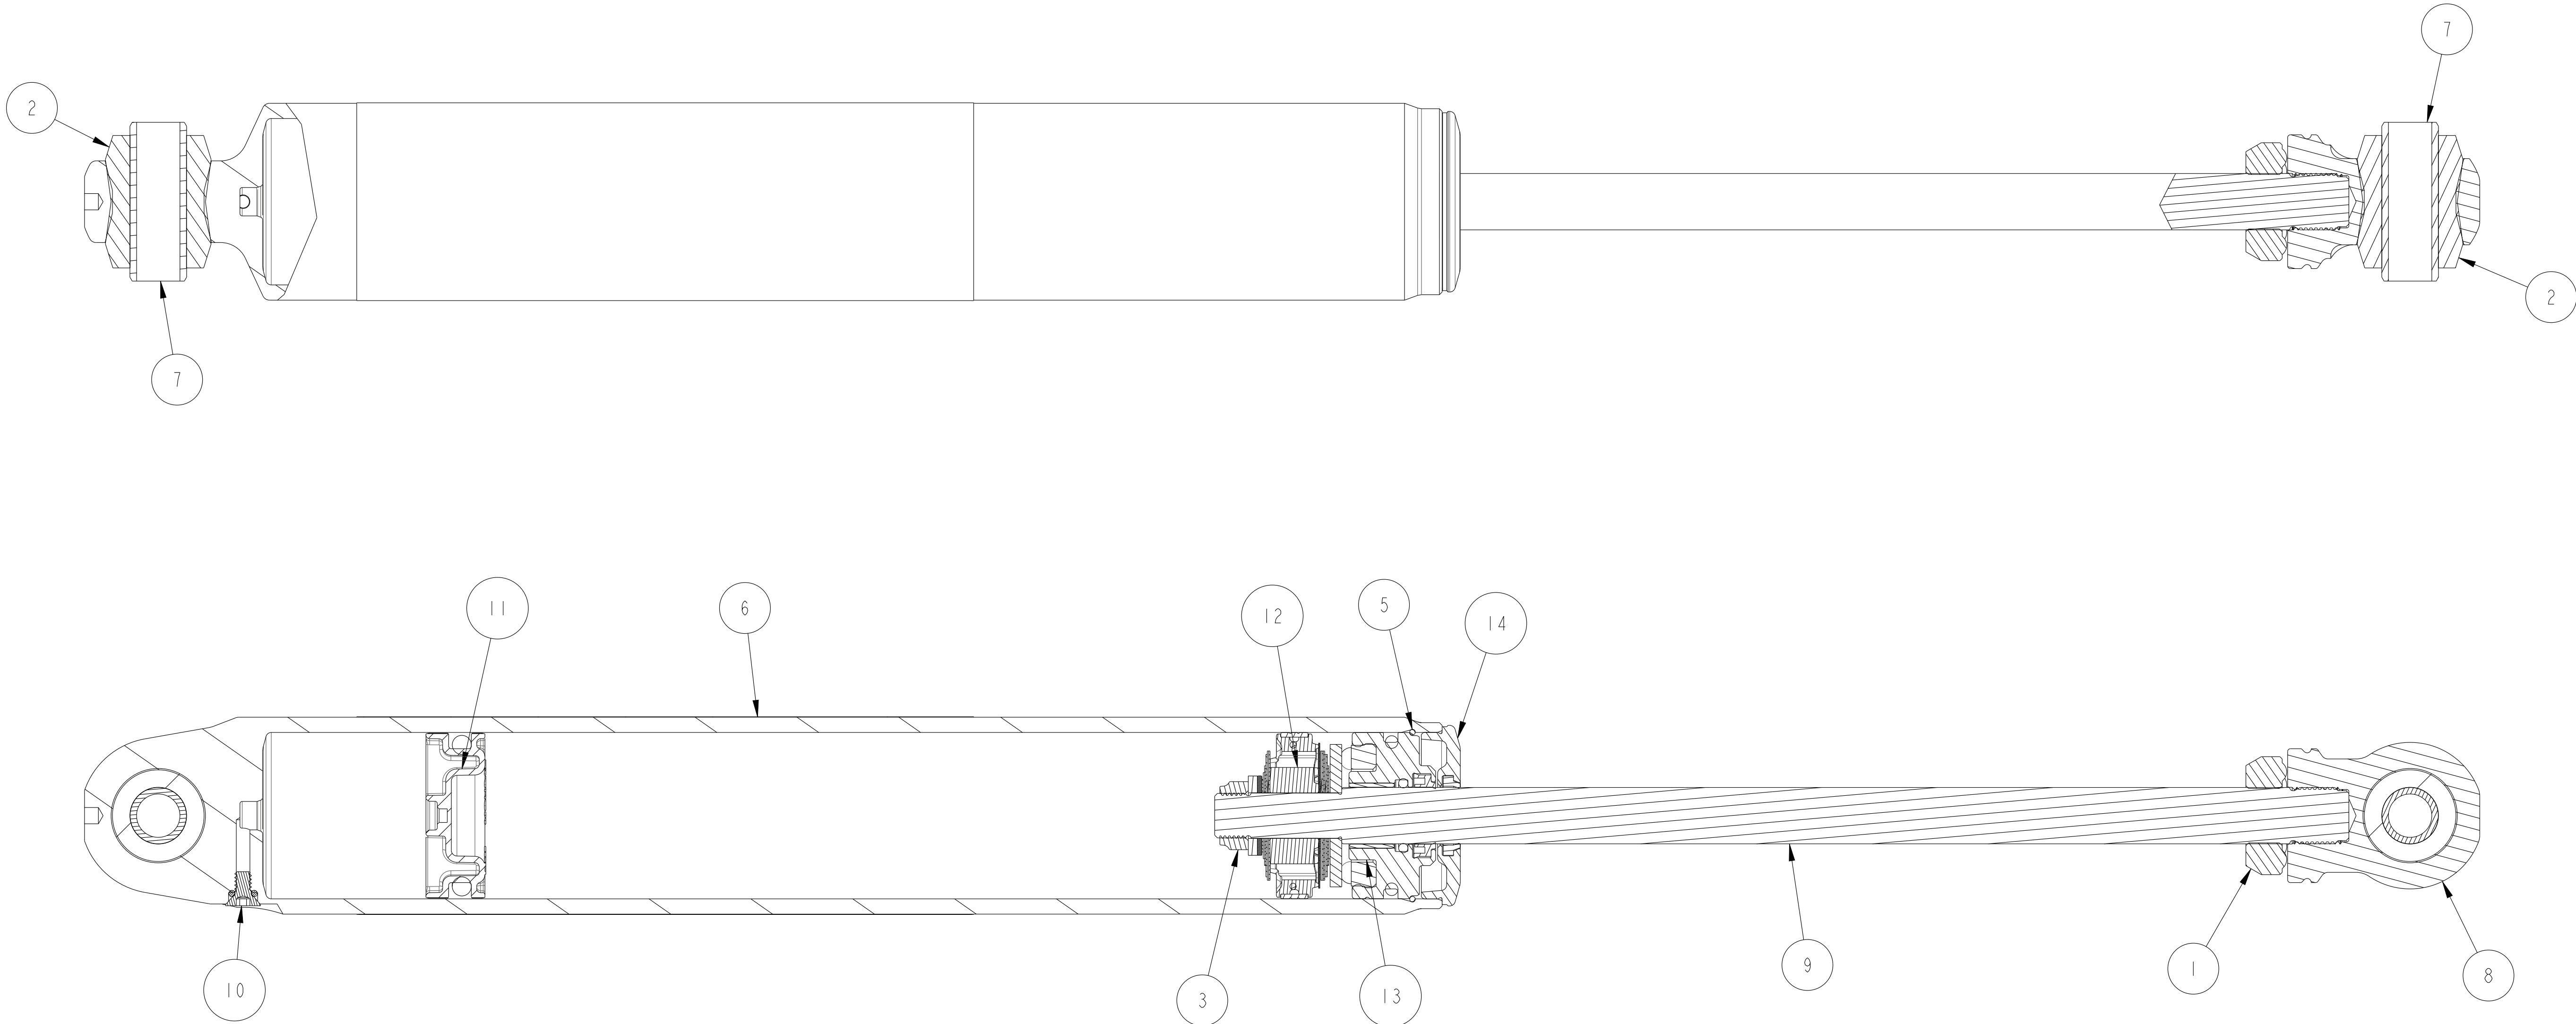

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	008-01-000-A	Bumper: B/O [Ø 0.620 Shaft, 0.453 TLG] nitrile
2	2	014-11-004-A	Bushing: Eyelet, Hourglass [Ø 0.625 ID X 1.460 TLG] Polyurethane, 85A
3	1	018-00-075	Fastener, Standard: Nut, Lock [1/2-20 X 0.313 TLG] Zinc Plate
4	1	024-04-146	Decal: Fox 2.0 PS, Body [6.8 X 6.8] Heritage Logo
5	1	038-01-005-A	Retaining Ring: Wire [0.062 CS X 1.850 ID] 17-7 SS
6	1	209-55-130-1	Body: (T) [Ø 1.834 Bore, Ø1.010 Eyelet Bore, 13.000 Bore Depth] Hourglass, Clear
7	2	213-27-005-B	Eyelet Parts: (T) Sleeve [Ø .478 ID X Ø .625 OD X 1.750 TLG] Steel, Clear Zinc
8	1	213-78-200	Eyelet Parts: (T) Eyelet [Ø 1.010 Bore X .950 W, 5/8-18 UNF, 1.350] Black Ano
9	1	229-60-125	Shaft: (T) [Ø 0.620 OD X 12.500 TLG] Steel, Chrome, Solid, 1.400 Post Length
10	1	800-10-012	Screw Assembly: [Flat Head Socket Cap #10-24 X 0.375 TLG] Steel Black Oxide, Com
11	1	805-00-049	Piston Assembly: Floating [Ø 1.834 Bore, 0.650 TLG] w/ Standard O-ring
12	1	807-20-006	Valving Assembly: 2.0 Performance Series, Tuned Combination 006
13	1	812-07-027	Bearing Assembly: [Ø 1.834 Bore, Ø 0.620 Shaft, 0.995 TLG]
14	1	812-11-019	Bearing Assembly: Bearing Cap Assembly [Ø 1.834 Bore, Ø 0.620 Shaft] Black Ano,

