


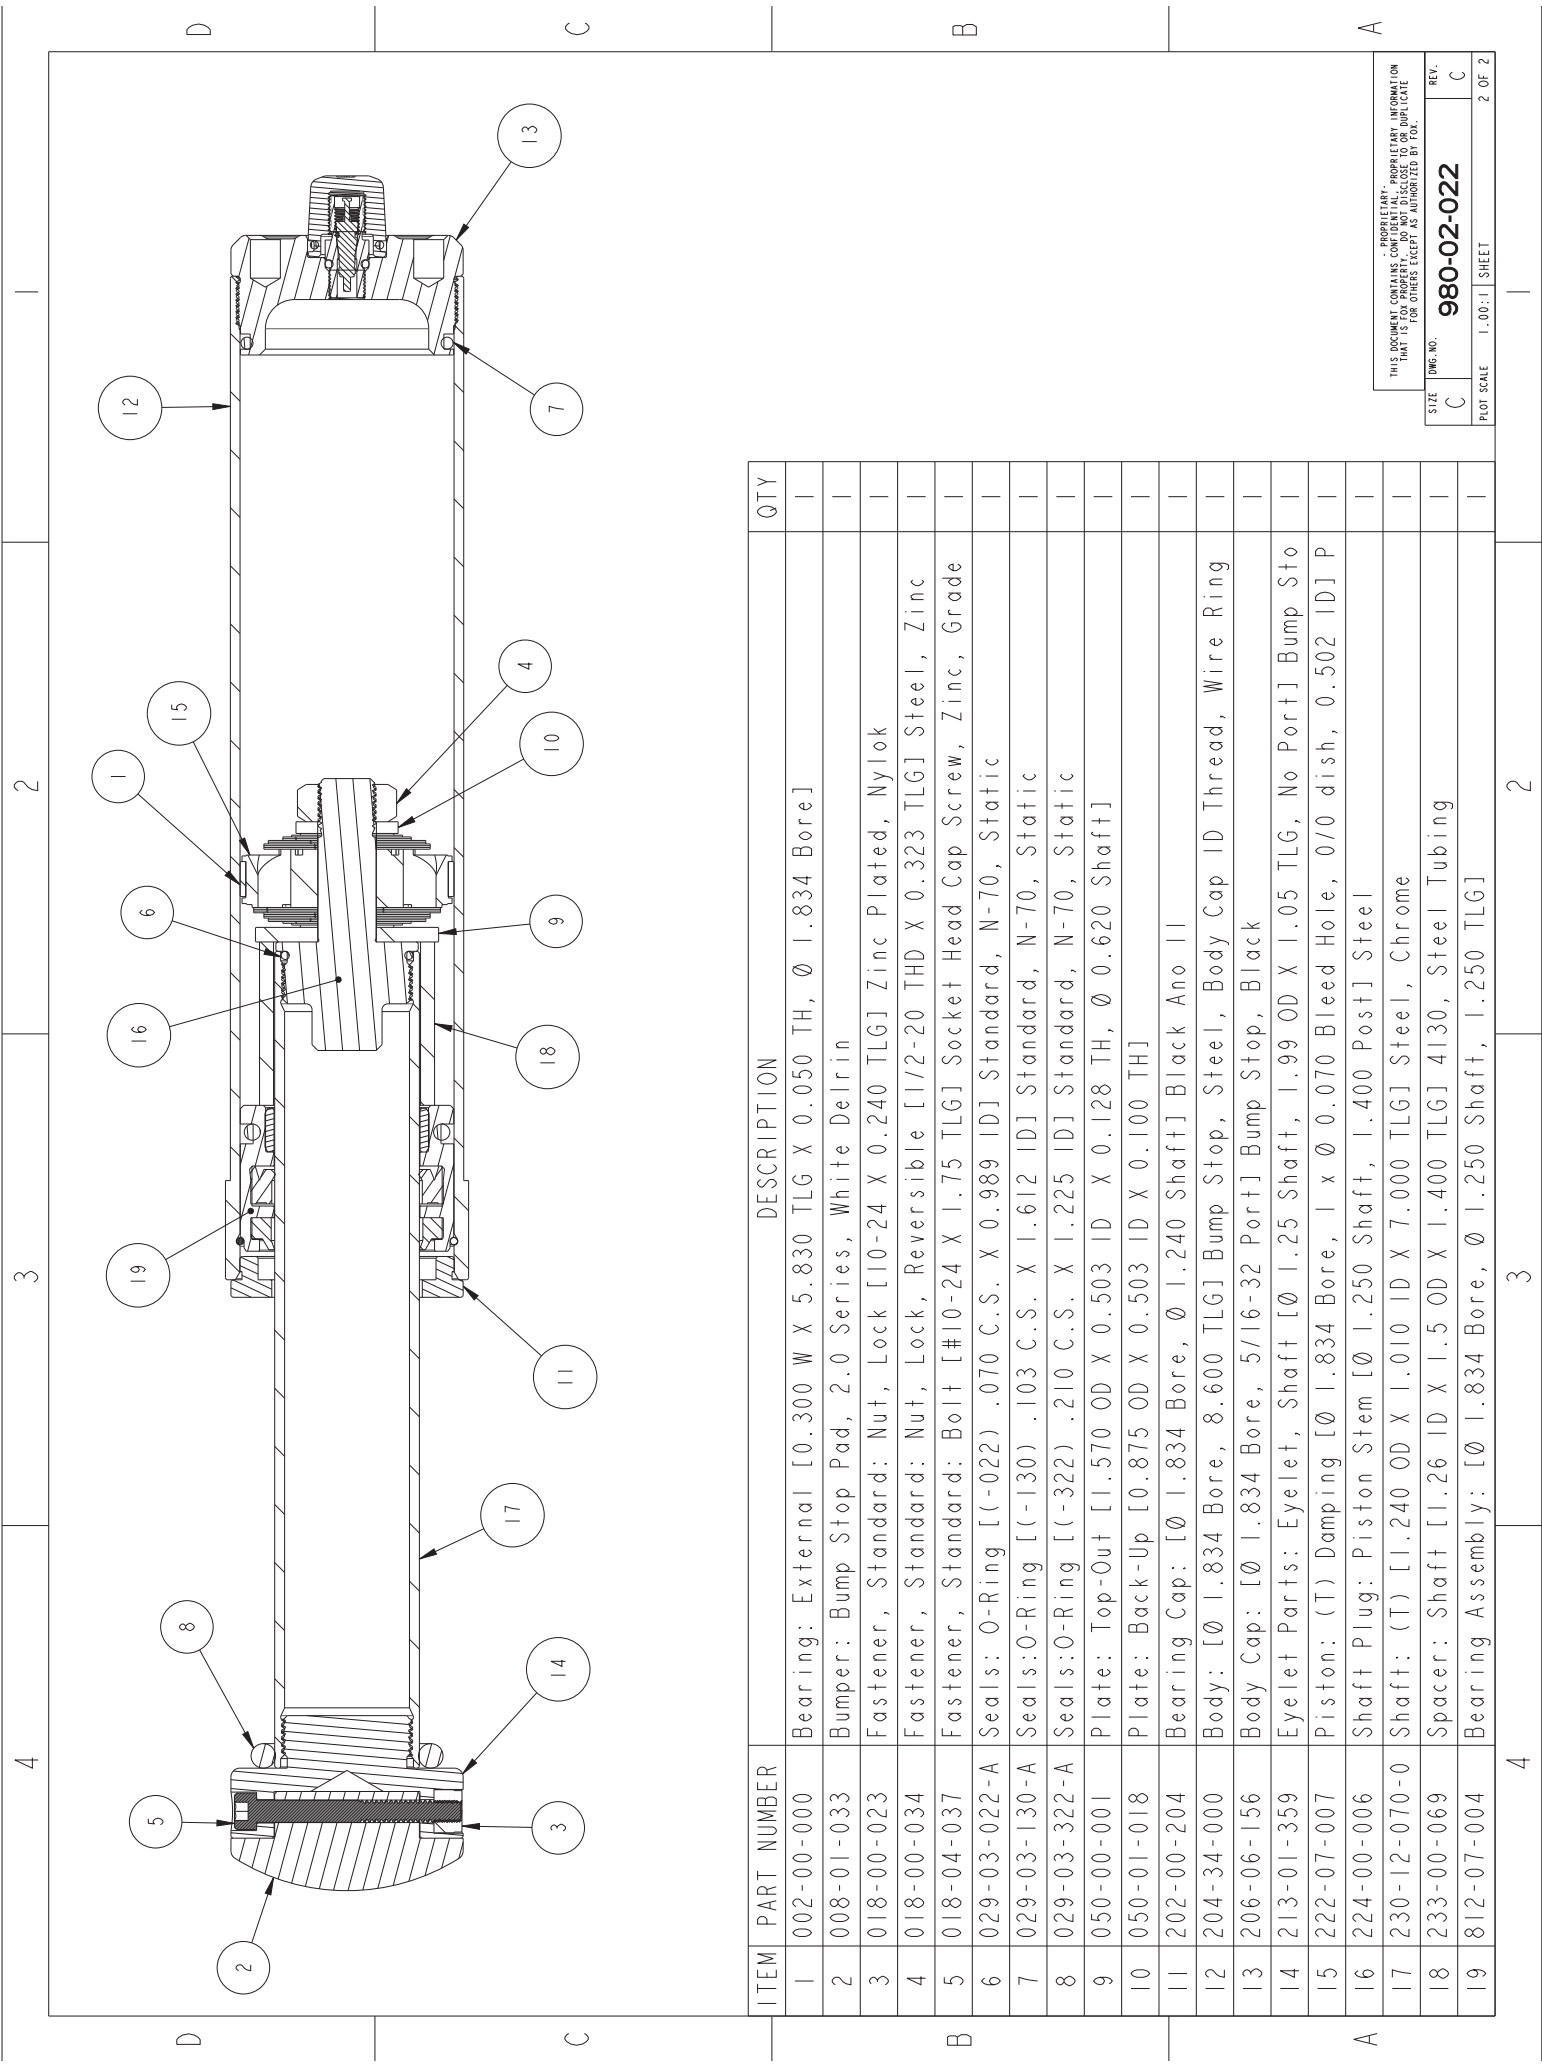

ITEM	PART NUMBER	DESCRIPTION	QTY
1	002-00-000	Bearing: External [0.300 W X 5.830 TLG X 0.050 TH, Ø 1.834 Bore]	1
2	008-01-033	Bumper: Bump Stop Pad, 2.0 Series, White Delrin	1
3	018-00-023	Fastener, Standard: Nut, Lock [10-24 X 0.240 TLG] Zinc Plated, Nylok	1
4	018-00-034	Fastener, Standard: Nut, Lock, Reversible [1/2-20 THD X 0.323 TLG] Steel, Zinc	1
5	018-04-037	Fastener, Standard: Bolt [#10-24 X 1.75 TLG] Socket Head Cap Screw, Zinc, Grade	1
6	029-03-022-A	Seals: O-Ring [(-022) .070 C.S. X 0.989 ID] Standard, N-70, Static	1
7	029-03-130-A	Seals:O-Ring [(-130) .103 C.S. X 1.612 ID] Standard, N-70, Static	1
8	029-03-322-A	Seals:O-Ring [(-322) .210 C.S. X 1.225 ID] Standard, N-70, Static	1
9	050-00-001	Plate: Top-Out [1.570 OD X 0.503 ID X 0.128 TH, Ø 0.620 Shaft]	1
10	050-01-018	Plate: Back-Up [0.875 OD X 0.503 ID X 0.100 TH]	1
11	202-00-204	Bearing Cap: [Ø 1.834 Bore, Ø 1.240 Shaft] Black Ano 11	1
12	204-34-000	Body: [Ø 1.834 Bore, 8.600 TLG] Bump Stop, Steel, Body Cap ID Thread, Wire Ring	1
13	206-06-156	Body Cap: [Ø 1.834 Bore, 5/16-32 Port] Bump Stop, Black	1
14	213-01-359	Eyelet Parts: Eyelet, Shaft [Ø 1.25 Shaft, 1.99 OD X 1.05 TLG, No Port] Bump Sto	1
15	222-07-007	Piston: (T) Damping [Ø 1.834 Bore, 1 x Ø 0.070 Bleed Hole, 0/0 dish, 0.502 ID] P	1
16	224-00-006	Shaft Plug: Piston Stem [Ø 1.250 Shaft, 1.400 Post] Steel	1
17	230-12-070-0	Shaft: (T) [1.240 OD X 1.010 ID X 7.000 TLG] Steel, Chrome	1
18	233-00-069	Spacer: Shaft [1.26 ID X 1.5 OD X 1.400 TLG] 4130, Steel Tubing	1
19	812-07-004	Bearing Assembly: [Ø 1.834 Bore, Ø 1.250 Shaft, 1.250 TLG]	1

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF THE COMPANY AND IS NOT TO BE
REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE
AUTHORIZATION OF THE COMPANY

REV. C

980-02-022

SIZE C

PLT SCALE 1.00:1

SHEET 2 OF 2