

4

3


2

1

| REVISIONS | | | | |
|-----------|-----|-------------------------------------|----------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| | A | RELEASED TO PRODUCTION | 9/26/13 | V HAMSO |
| | B | CHANGED AIR VALVE CAP | 10/10/13 | BS |
| | C | NEW SHAFT, EYELET, BODYCAP, VALVING | 10/31/14 | BS |
| | D | CHANGED SHAFT NUT | 10/15/15 | MD |
| | E | ADDED -I CUSTOM PN | 3/16/16 | JK |
| | F | CHANGED TO VALVING SUB | 4/6/17 | CR |



NOTE:
STAINLESS STEEL
FAV: 802-00-031

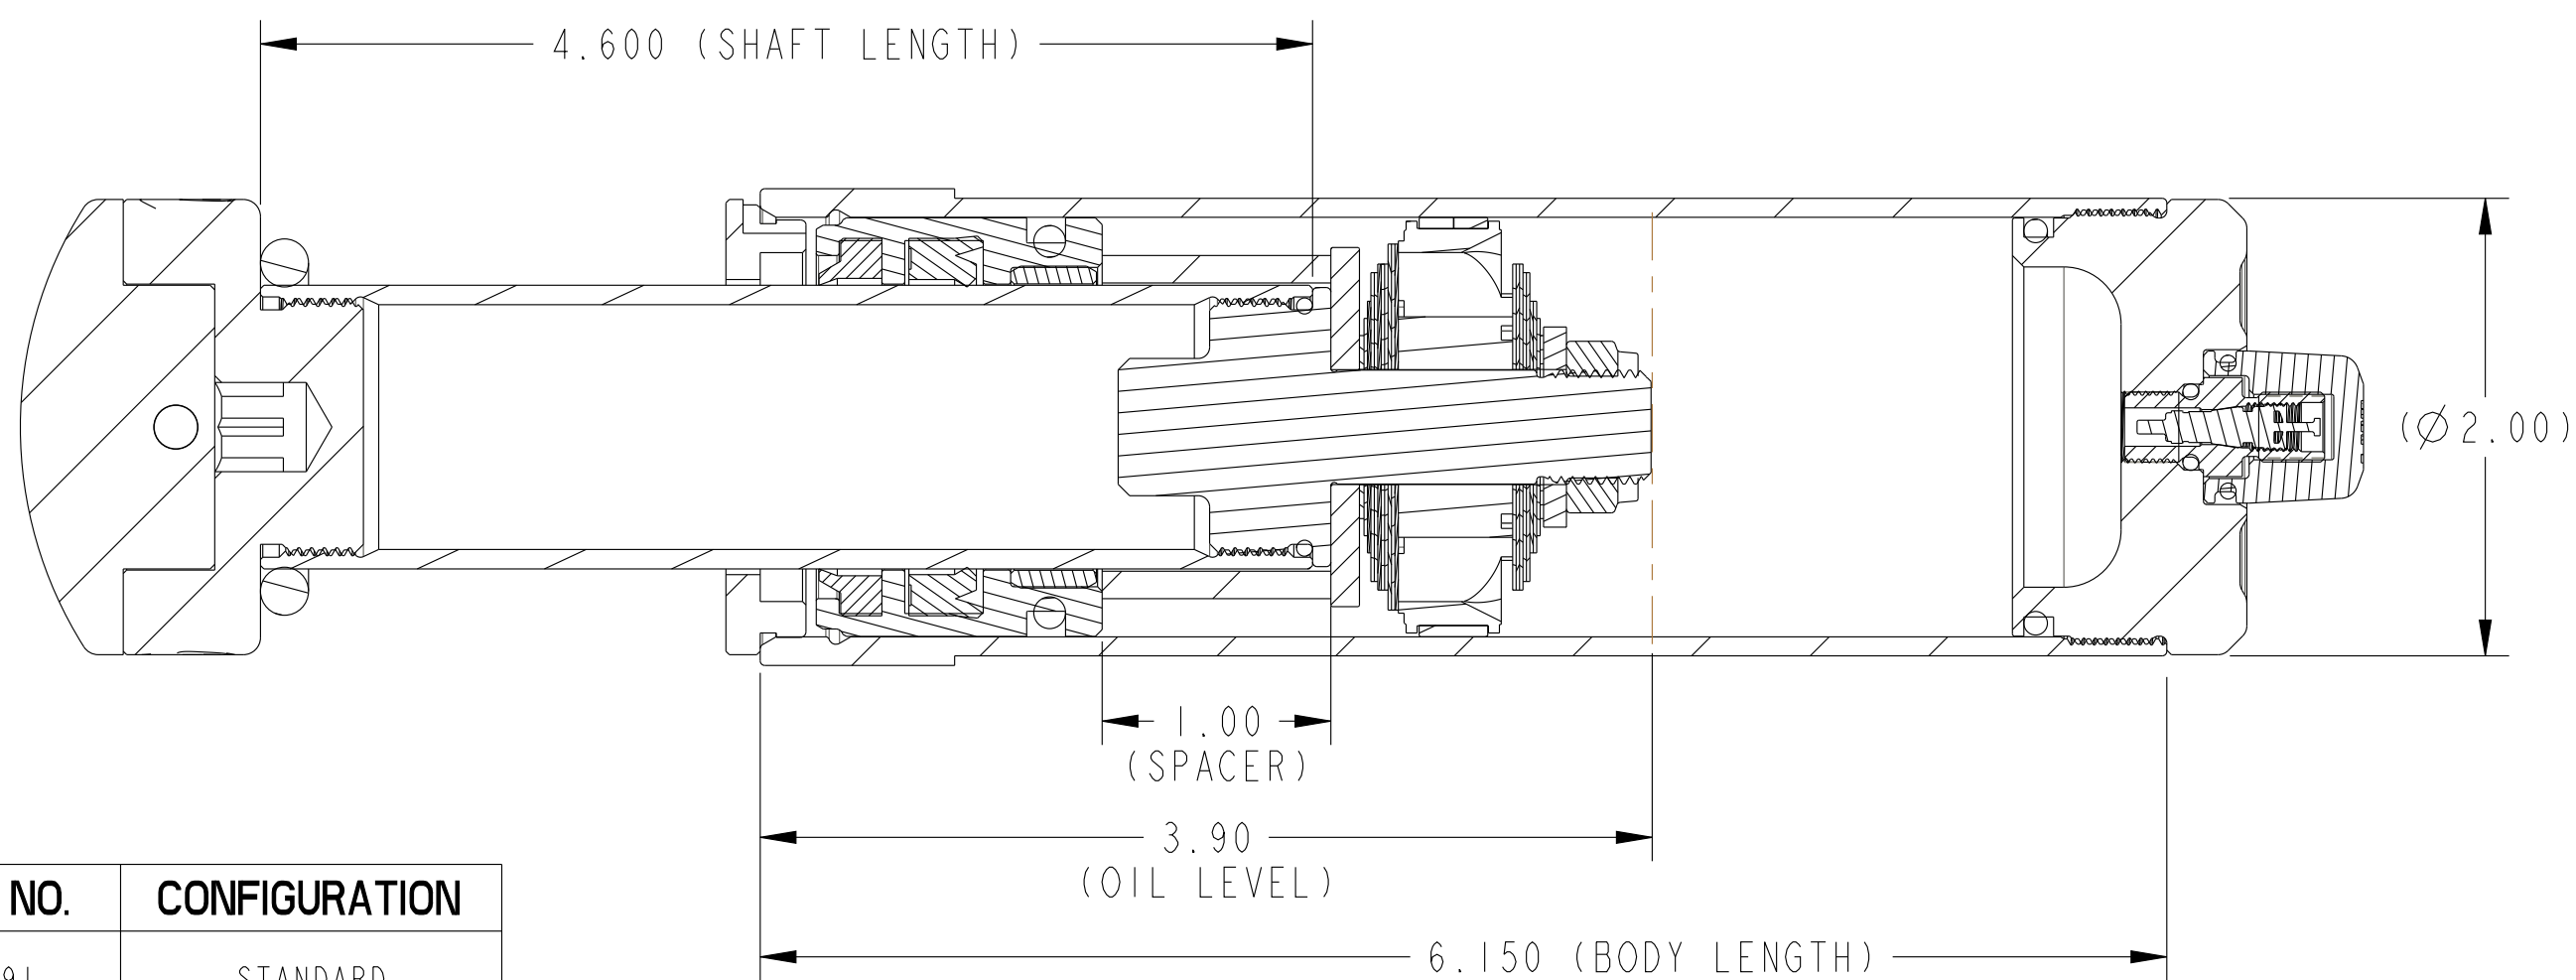

NOTE:
SEE SHEET 2 FOR
BILL OF MATERIALS

| PART NO. | CONFIGURATION |
|--------------|---------------|
| 983-02-091 | STANDARD |
| 983-02-091-1 | CUSTOM |

- NOTES:
1. VALVING: 807-24-007
 2. SEALS: STANDARD
 3. OIL LEVEL: 3.90" (80 cc)
 4. NITROGEN CHARGE: 200 ± 10 PSI

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.


| | | | | | |
|---|--|--|--|---|--|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES [MM] | | PER ASME Y14.5M 1994 | | FOX Factory, Inc. <small>130 Hangar Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312</small> | |
| TOLERANCES ARE: DECIMALS .XX [.X] ± .01 [0,25] .XXX [.XX] ± .005 [0,13] | | APPROVALS DWN. BY V HAMSO CHK. BY ENG. MFG. ADD. | | DATE | |
| THIRD ANGLE PROJECTION | | TITLE 2.0" BUMP STOP, Ø1.250 SHAFT, A/S, 2.0 SERIES, BLACK | | SIZE DWG. NO. C 983-02-091 | |
| DO NOT SCALE DRAWING | | PLOT SCALE .00:1 | | SHEET 1 OF 2 | |

4

3

2

1

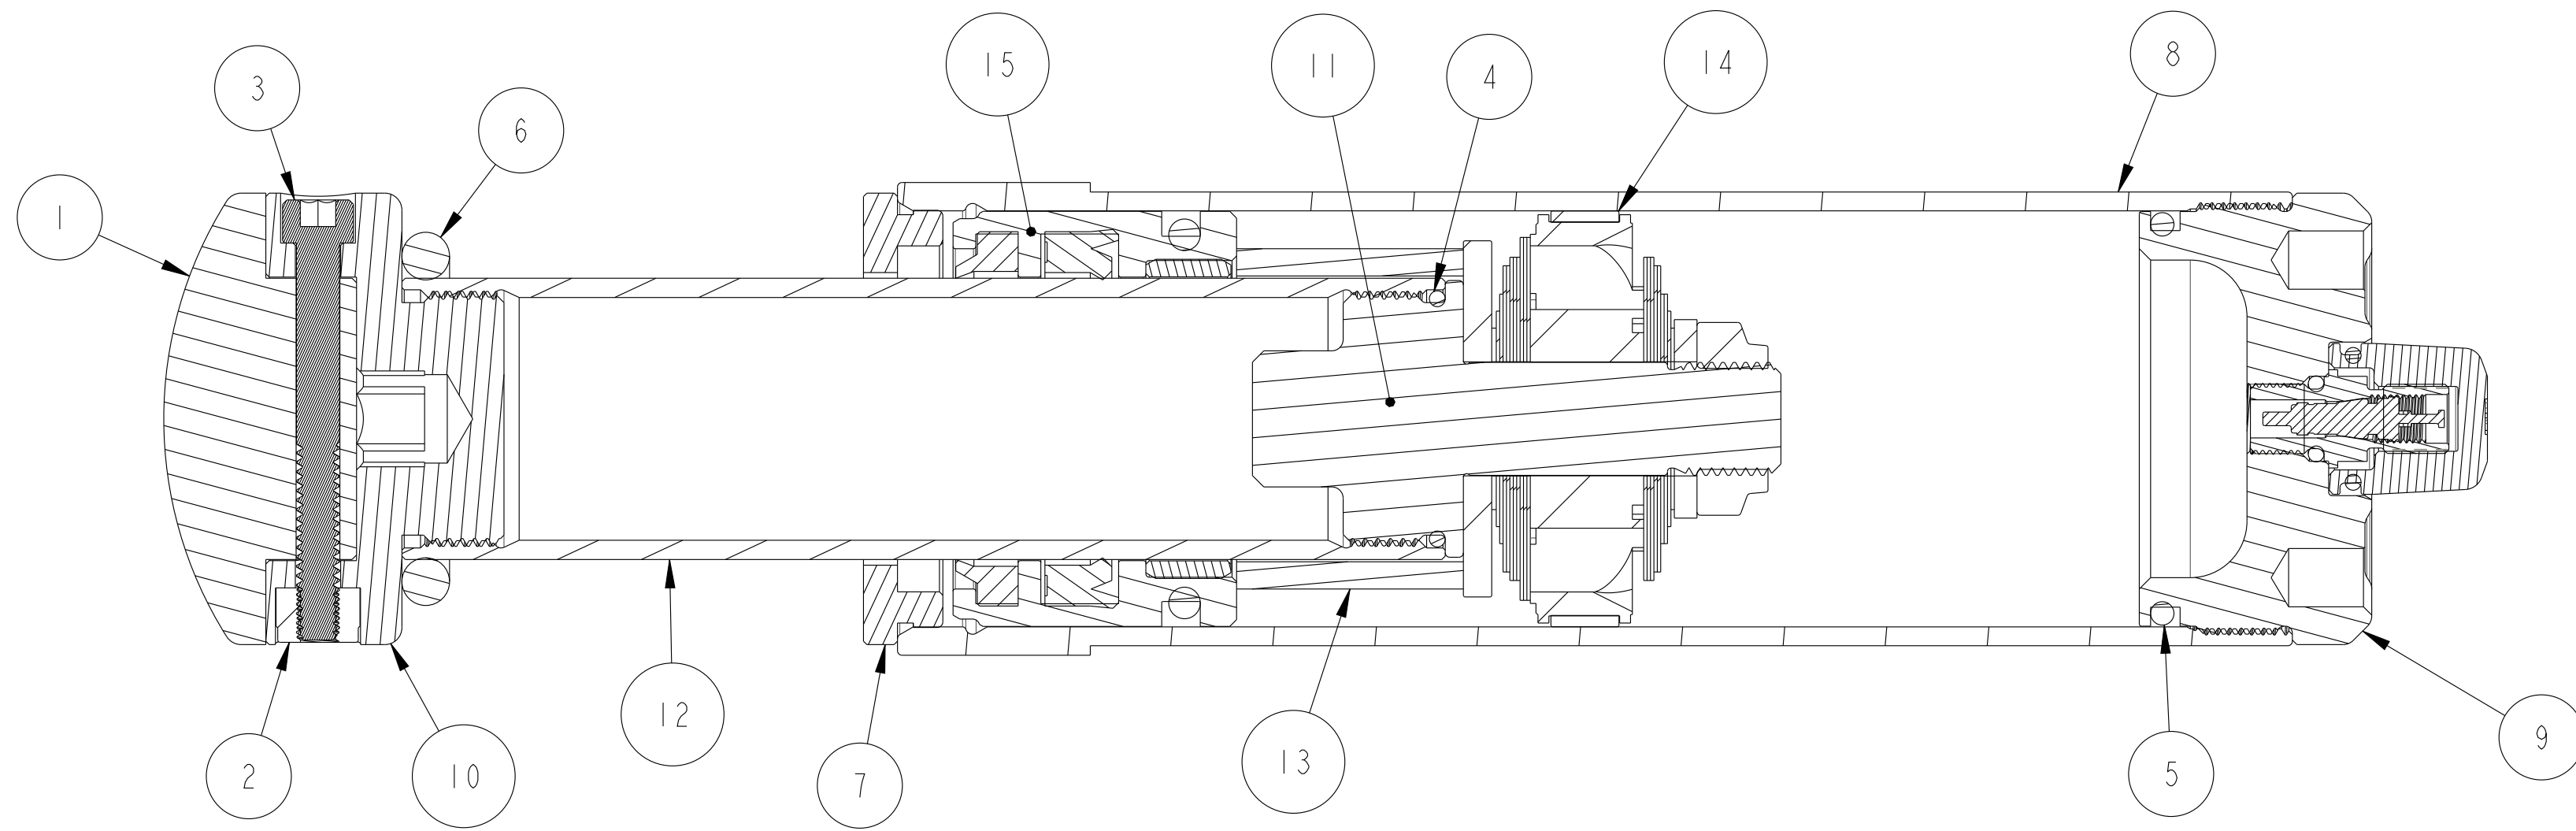

| ITEM | PART NUMBER | DESCRIPTION | QTY |
|------|--------------|--|-----|
| 1 | 008-01-033 | Bumper: Bump Stop Pad, 2.0 Series, White Delrin | 1 |
| 2 | 018-00-023 | Fastener, Standard: Nut, Lock [10-24 X 0.240 TLG] Zinc Plated, Nylok | 1 |
| 3 | 018-04-037 | Fastener, Standard: Bolt [#10-24 X 1.75 TLG] Socket Head Cap Screw, Zinc, Grade | 1 |
| 4 | 029-03-022-A | Seals: O-Ring [(-022) .070 C.S. X 0.989 ID] Standard, N-70, Static | 1 |
| 5 | 029-03-130-A | Seals:O-Ring [(-130) .103 C.S. X 1.612 ID] Standard, N-70, Static | 1 |
| 6 | 029-03-322-A | Seals:O-Ring [(-322) .210 C.S. X 1.225 ID] Standard, N-70, Static | 1 |
| 7 | 202-00-204 | Bearing Cap: [Ø 1.834 Bore, Ø 1.240 Shaft] Black Ano II | 1 |
| 8 | 204-34-108 | Body: [Ø 1.834 Bore, 6.150 TLG] Clear Zinc, Bump Stop, Steel, Body Cap ID Thread | 1 |
| 9 | 206-06-156 | Body Cap: [Ø 1.834 Bore, 5/16-32 Port] Bump Stop, Black | 1 |
| 10 | 213-01-359 | Eyelet Parts: Eyelet, Shaft [Ø 1.25 Shaft, 1.99 OD X 1.05 TLG, No Port] Bump Sto | 1 |
| 11 | 224-00-006 | Shaft Plug: Piston Stem [Ø 1.250 Shaft, 1.400 Post] Steel | 1 |
| 12 | 230-12-046-0 | Shaft: (T) [1.240 OD X 1.010 ID X 4.600 TLG] Steel, Chrome | 1 |
| 13 | 233-00-046 | Spacer: Shaft [1.26 ID X 1.50 OD X 1.000 TLG] 4130, Steel Tubing | 1 |
| 14 | 807-24-007 | Valving Assembly: 2.0 Performance Series, Tuned Combination | 1 |
| 15 | 812-07-004 | Bearing Assembly: [Ø 1.834 Bore, Ø 1.250 Shaft, 1.250 TLG] | 1 |

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

| | | |
|-------------------------|-------------------------------|-----------|
| SIZE C | DWG. NO. 983-02-091 | REV. E |
| PLOT SCALE 1.00:1 SHEET | | 2 OF 2 |